



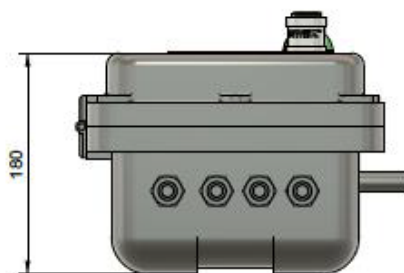

EX-PROOF ELECTRONIC GROUNDING DEVICE (EGD)

ATEX CERTIFICATE: INSEMEX-OEC.ATEX.23.0332X

CE  Ex d II G Ex d [ia] ia II B T6 Gb

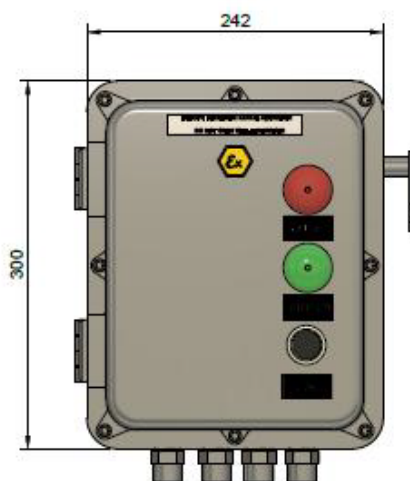

APPLICATIONS

Ex-proof electronic grounding device, Zone-1, Zone-21, Zone-2 and Zone-22 suitable for use in ex-proof environments.

MATERIAL

Body; aluminum casting (ETIAL 171)
Colour: RAL 7040(grey)

PRODUCT DETAILS

start button, green signal light, and red signal light on the cover.

0-1 spring return switch with clamp connection.
3x1/2" holes (two cable gland and one blind plug included).

explosion-proof clamp and 10 meters of 2x2.5 mm² cable included.

220V, 50 Hz

IP 66

TECHNICAL SPECIFICATIONS

The operating voltage is 220V AC. Pliers on the grounding device, tanker Etc. Connected to the electrostatically charged device. It allows operation if the grounding resistance between the mains ground and the device is less than 20 ohms. In case of grounding connection faults (cut, rupture) that may occur during operation, it cuts off the electricity and the red light on it turns on.