

EYS series sealing fittings prevent the passage of gas, vapours or flames through the pipe system in the electrical installation.

They are used for vertical mounting and available in two different shapes, the first for dimensions less than 1", and the second up to 3" with an additional lateral opening for an easy introduction of the fiber. The sealing fittings must be installed as close as possible to the Ex d junction box and in accordance with the standard EN60079-1. They must be filled only with CRV420 resin that has to be requested in the amount indicated in the table. It is not allowed the use of other types of sealing compound.



Classification:
2014/34/UE

Group II

Category 2GD

Installation:
EN 60079-14

zone 1 - zone 2 (Gas)

zone 21 - zone 22 (Dust)

Marking:

CE 0722 Ex II 2 GD Ex db IIC Gb Ex tb IIIC Db IP66

Certification:

ATEX CESI 03 ATEX 085

IECEX IECEX CES 14.0019X

TR CU AVAILABLE

All IEC Ex and TR CU certification data can be downloaded at www.cortemgroup.com

Standards:

CENELEC EN 60079-0: 2012, EN 60079-1: 2007, EN 60079-31: 2009 and EUROPEAN DIRECTIVE 2014/34/UE
IEC60079-0: 2011, IEC60079-1: 2007-04, IEC60079-31: 2008 Directive RoHS 2002/95/CE

Ambient Temp. (EYS):

-20°C +100°C


Operating temperature:

-20°C +100°C

Degree of protection:

IP66

Certificates are available on www.cortemgroup.com

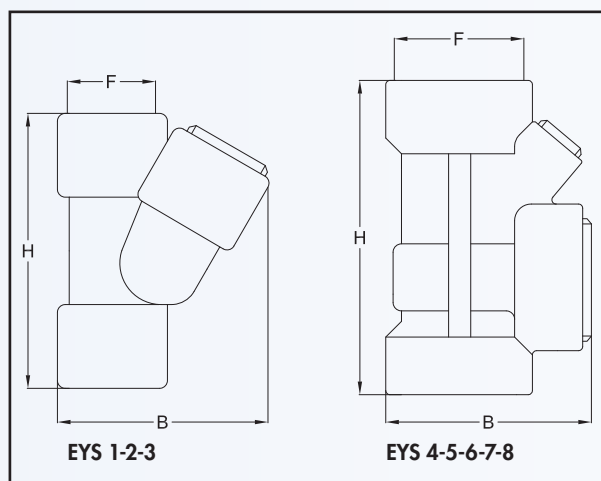

SELECTION TABLE OF EYS VERTICAL SEALING FITTINGS

Code In aluminium	Thread	Dimensions in mm		Amount of resin	Weight
	F	H	B	gr	Kg
EYS1	1/2" ISO 7/1	77	56	35	0,097
EYS2	3/4" ISO 7/1	87	66	50	0,147
EYS3	1" ISO 7/1	105	82	100	0,242
EYS4	1 1/4" ISO 7/1	145	84	240	0,576
EYS5	1 1/2" ISO 7/1	145	84	240	0,528
EYS6	2" ISO 7/1	150	95	380	0,643
EYS7	2 1/2" ISO 7/1	200	134	1250	1,580
EYS8	3" ISO 7/1	200	134	1250	1,480

TECHNICAL NOTES:

- Available also with NPT thread (example code EYS2N)
- Available upon request in stainless steel