

Aluminium Body
Low Cooper



ZNB.X

Motor Protection Switch

2 x 3/4"
Cable entries



ZONE 1-2 / 21-22

IP 65-66

$-20\text{ }^{\circ}\text{C} < T_a < +55\text{ }^{\circ}\text{C}$

Product Certification Marking

Aluminium Body Junction Boxes

SCA 20 ATEX 068 X

II 2G Ex db IIB+H₂ T6 Gb

II 2D Ex tb IIIC T85°C Db

IP Ambiant Temp.

IP 65-66

-20 °C up to +55 °C

Standarts

EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014

Cable Entries

2x3/4 - 2x1/2 Npt.

Body

Low Cooper Aluminium Alloy

Gaskets

NBR o-ring on Body

Paint

Electrostatic Powder Coat

Rated Voltage

220-380V

Frequency

50-60 Hz



Application

Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

Protection Range

0,63 - 10A

DIMENSIONAL DRAWING

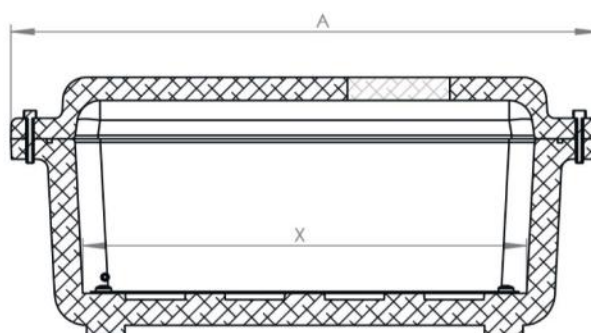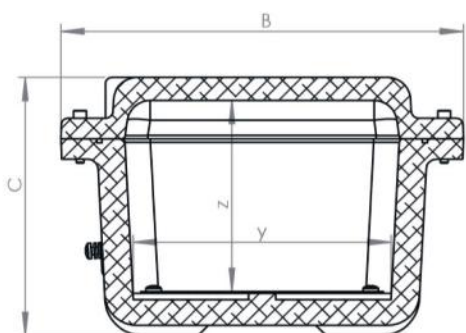

External

Internal

	A	B	C	x	y	z	Plate
ZNB-2	275	200	143	200	123	104	190x113



Current

Order Code

0,63-1 A

102501

1-1.6 A

102502

1,6-2,5 A

102503

2,5-4 A

102504

4-6 A

102505

6-10 A

102506

