

MODEL INFORMATION / MODEL BİLGİLERİ

BRAND / MARKA

PRODUCT / ÜRÜN

MODELS / MODELER

OPTIONS / OPSİYONLAR**MATERIALS / MALZEME CİNSİ**

ENCLOSURE / GÖVDE

DIFFUSER / DİFÜZÖR

GASKET / CONTA TÜRÜ

APPROVALS / SERTİFİKA BİLGİLERİ

ATEX CERTIFICATE / ATEX SERTİFİKASI

ATEX MARKING / ATEX KODLARI

- RB 250 LED & RB 150 LED & RB 230 LED

IECEX CERTIFICATE / IECEX SERTİFİKASI

TECHNICAL FEATURES / TEKNİK ÖZELLİKLER

INTENDED USE / KULLANIM ALANLARI

AMBIENT TEMPERATURE RANGE /

UYGUN ORTAM SICAKLIĞI (TAMB)

- RB 230 LED

- RB 250 LED, RB 150 LED

IP RATING / IP DERECESİ

ENTRIES / KABLO GİRİŞLERİ

CABLE GLANDS / KABLO RAKORLARI

THROUGH WIRING /

GİRDİ-ÇIKTI BAĞLANTI UYGUNLUĞU

MOUNTING KIT / MONTAJ TAKIMLARI

OTHER SPECIFICATIONS / DİĞER ÖZELLİKLER

ROBUSTEX

EXPROOF LED ARMATÜR /
EXPROOF LED LUMINAIRERB 250 LED (2x50 W LED LINEAR LUMINAIRE / 2x50 W LED ARMATÜRLER)
RB 150 LED (1x50 W LED LINEAR LUMINAIRE / 1x50 W LED ARMATÜRLER)
RB 230 LED (2x30 W LED LINEAR LUMINAIRE / 2x30 W LED ARMATÜRLER)1- RB...LED MS : Micro Switch (Kapak Mikro Sviçi)
2- RB...LED EM2H : Emergency Pack 2 Hours (Acil Durum Kiti 2 Saatlik)
3- RB... LED EM3H : Emergency Pack 3 Hours (Acil Durum Kiti 3 Saatlik)

Polyester

Polycarbonate (UV transparant) / UV'ye karşı dayanıklı polikarbonat

EPDM gasket / EPDM conta

ExVeritas 17 ATEX 0288 X

II 2G Ex e mb o p is IIC T4 Gb (According to; EN/IEC60079-0; -18; -28; -7)

IECEX EXV 16.0010X Gb

Zone-1 / Zone-21 / Zone-2 / Zone-22

-20°C To +50°C / -20°C ile +50°C aralığında

-20°C To +40°C / -20°C ile +40°C aralığında

IP 66

3x M25

3x M25x1,5 mm Ex-e polyester cable glands / Ex-e polyester kablo rakoru.
1x M25x1,5 mm Ex-e polyester male plug / Ex-e polyester kör tapa.- Loop in-loop out facility with 4 mm² cable /
Girdi-çıkıtlı bağlantı modeline uyumlu (4 mm²'lik kablolar ile)
Galvanized ceiling type mounting kit (Included) / Galvanizli tavan montaj takımı (Ürüne dahil)
- 4X Metal clamps (1 For allen tool) /
4X Gövdede bulunan metal kilit (1 tanesi alyen anahtarı ile açılır.)

LAMPS / LED TİPİ

RATED VOLTAGE / NÖMİNAL GERİLİM

FREQUENCY / ÇALIŞMA FREKANSI

COLOR TEMPERATURE / RENK SICAKLIĞI

EMERGENCY KIT OPTIONS / ACİL DURUM KİTİ

RB 250 LED EM3H

RB 150 LED EM3H

RB 230 LED EM2H

CRI 85 Extended Long Life / Uzun Ömürlü

RB 250 LED 2x50 W Linear LED Module / Lineer Led Modülü

RB 150 LED 1x50 W Linear LED Module / Lineer Led Modülü

RB 230 LED 2x30 W Linear LED Module / Lineer Led Modülü

220 – 240 V

50/60 Hz

RB 150 LED 5600 lm (6000K) / 5000 lm (4000K)

RB 250 LED 11200 lm (6000K) / 10000 lm (4000K)

RB 230 LED 7000 lm (5700K)

1xMikroswitch standart; 2nd Optional / 1xMikrosviç standart; 2. opsiyonel

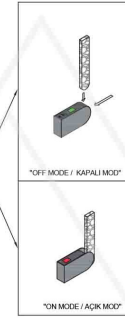
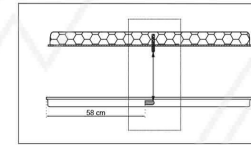
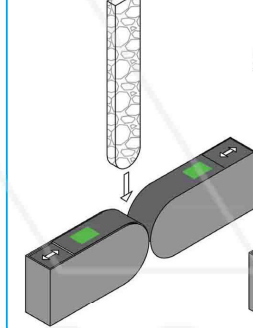
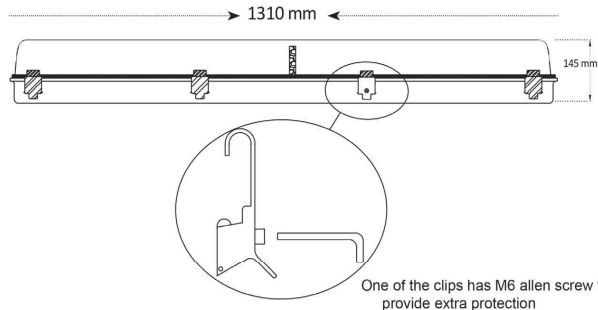
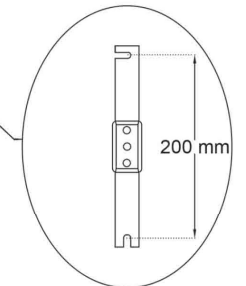
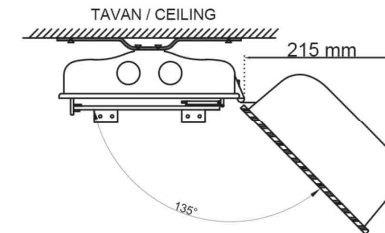
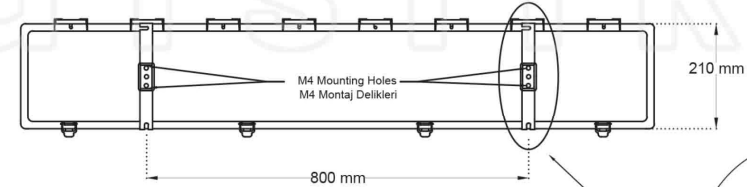
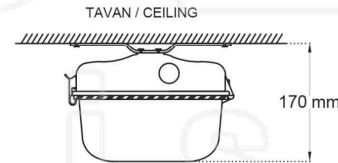
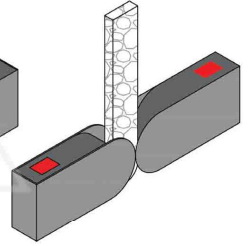
180 Minutes Emergency Operation By 1x50w Led Module / 180 Dk. 1x50w Led Modülü bataryadan yanar

1xMikroswitch standart; 2nd Optional / 1xMikrosviç standart; 2. opsiyonel

180 Minutes Emergency Operation By 1x50w Led Module / 180 Dk. 1x50w Led Modülü bataryadan yanar

1xMikroswitch standart; 2nd Optional / 1xMikrosviç standart; 2. opsiyonel

120 Minutes Emergency Operation By 2x30w Led Module / 120 Dk. 2x30w Led Modülü bataryadan yanar

EMERGENCY LUMINAIRE / ACİL DURUM KİTLİ MODELSTANDART 1xMICROSWİTCH
/ STANDART 1xMİKROSVİÇ**Double Microswitch System For Emergency Kit (OPTIONAL) /
Acil Durum Kiti için Çift Mikrosviç Sistemi (OPSİYONEL)**OFF POSITION FOR BALLAST AND BATTERY /
BALLAST VE BATARYA İÇİN OFF POZİSYONUON POSITION FOR BALLAST AND BATTERY /
BALLAST VE BATARYA İÇİN ON POZİSYONUOne of the clips has M6 allen screw to
provide extra protection