


SLED-ME

- Zone 1, 2, 21, 22
- Mechanical strength
- Reliability over time
- Instant, bright illumination
- IK11

Tempered glass

*Painted aluminium
body and cover*

*Ex e terminal board
housing for fast connection*

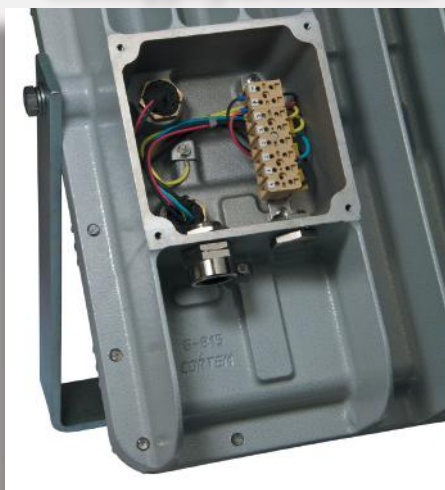

Mounting bracket

SLED-ME series LED floodlights "square shaped beam"

SLED-ME series floodlights with LED technology combine lightweight, compact design, high performance in terms of reliability, safety, efficiency and energy saving. The finned body of the floodlight acts as a heat sink for the LED plate, allowing the installation of greater light output without incurring the deterioration of the LEDs. The flat protective glass is resistant to shocks and high temperatures and ensures an environment friendly lighting. Due to their high luminous output and to a white light with a colour rendering index greater than 70, SLED-ME series floodlights are able to replace the traditional rectangular floodlights that use discharge lamps sodium vapour or metal halide, guaranteeing lighting quality and visual comfort.

Application sectors:



CERTIFICATION DATA

Classification:	Group II	Category 2GD		
Installation: EN 60079.14	zone 1 - zone 2 (Gas)	zone 21 - zone 22 (Dust)		
Marking:	CE 0722 Ex II 2GD - Ex db eb IIB+H ₂ T... Gb - Ex tb IIIC T...°C Db - IP66			
Certification:	ATEX CML 19 ATEX 1312			
	IECEX IECEX CML 17.0004	All IEC Ex, UKEX and INMETRO certification data can be downloaded at www.cortemgroup.com		
	UKEX AVAILABLE			
	INMETRO DNV 19.0034 X For SLED-250, SLED-400, SLED-600, SLED-1000			
Standards:	CENELEC EN 60079-0: 2018, EN 60079-1: 2014, EN 60079-7: 2015, EN 60079-31: 2014 and EUROPEAN DIRECTIVE 2014/34/UE IEC 60079-0: 2017, IEC 60079-1: 2014-06, IEC 60079-31: 2013, IEC 60079-7: 2015 European Directive 2004/108 Electromagnetic compatibility European Directive 2012/19/UE, 2002/96/CE, 2003/108/CE WEEE European Directive 2011/65/UE RoHS			
Degree of protection:	IP66			

Ambient temperature, class. temperature, max. surface temperature:

Old code	Código	(IIB+H ₂)		(solo per IIB)	
SLED-250	SLED-ME-250120	-20°C + 40°C T6/85°C	-20°C + 60°C T5/100°C	-40°C + 40°C T6/85°C	-40°C + 60°C T5/100°C
SLED-401	SLED-ME-250180	-20°C + 40°C T5/98°C	-	-40°C + 40°C T5/99°C	-
SLED-400	SLED-ME-400200	-20°C + 40°C T6/85°C	-20°C + 60°C T5/100°C	-40°C + 40°C T6/85°C	-40°C + 60°C T5/100°C
SLED-601	SLED-ME-400300	-20°C + 40°C T5/90°C	-20°C + 50°C T5/100°C	-40°C + 40°C T5/90°C	-40°C + 50°C T5/100°C
SLED-600	SLED-ME-600300	-20°C + 40°C T6/85°C	-20°C + 60°C T5/100°C	-40°C + 40°C T6/85°C	-40°C + 60°C T5/100°C
SLED-1000	SLED-ME-600400	-20°C + 40°C T5/93°C	-20°C + 50°C T4/103°C	-40°C + 40°C T5/93°C	-40°C + 50°C T4/103°C
SLED-1001	SLED-ME-600500	-20°C + 40°C T6/85°C	-20°C + 55°C T5/100°C	-40°C + 40°C T6/85°C	-40°C + 55°C T5/100°C

SLED-ME series LED floodlights "square shaped beam"

SLED-ME-250120



SLED-ME-400200



SLED-ME-600300



EXEMPT FROM
PHOTOBIOLOGICAL RISK
(STANDARD IEC / EN 62471)



ORIGINAL PRODUCT

SLED-ME-250180



SLED-ME-400300



SLED-ME-600400 ...600500



MECHANICAL FEATURES

Body:	Low copper content aluminium alloy fitted with cooling fins for better heat dissipation
Glass face:	Shock and temperature resistant tempered glass sealed with aluminium ring
Supporting bracket:	Galvanised steel
Gaskets:	Acid, hydrocarbon and high temperature resistant silicone
Bolts and screws:	Stainless steel
Entries:	2 x ISO M20 entries (SLED-ME-250120, SLED-ME-250180); (Floodlight kit with plug PLG11B and cable gland NAVS201B) ISO M25 entries (SLED-ME-400200, SLED-ME-400300, SLED-ME-600300, SLED-ME-600400, SLED-ME-600500) (Floodlight kit with plug PLG21B and cable gland NAV251B)
Coating:	Polyester coating Ral 7035 (Light grey)
Corrosion Resistance:	The STANDARD of the aluminium alloy used by Cortem has passed the tests required by standards EN60068-2-30 (hot/humid cycles) and EN60068-2-11 (salt mist tests)


ACCESSORIES AVAILABLE / SPECIAL REQUESTS

Different colour temperature (code SLED-ME-250120/**2700K**)

SLED-ME series LED floodlights "square shaped beam"

Code	Dimensions mm				Watt	Class / Max surface temp. °C				Weight kg	 mm	
	A	B	B1	C		TA=+40°C	TA=+50°C	TA=+55°C	TA=+60°C			
Zona 1, 2, 21, 22	SLED-ME-250120	310	360	460	135	122 W	T6/85°C	-	-	T5/100°C	13,5	470x345x150
	SLED-ME-250180	310	360	460	135	180 W	T5/98°C	-	-	-	13,5	470x345x150
	SLED-ME-400200	360	444	520	145	194 W	T6/85°C	-	-	T5/100°C	20,3	540x410x180
	SLED-ME-400300	360	444	520	145	290 W	T5/90°C	T5/100°C	-	-	20,3	540x410x180
	SLED-ME-600300	440	540	600	165	290 W	T6/85°C	-	-	T5/100°C	32,4	600x465x180
	SLED-ME-600400	440	540	600	165	400 W	T5/93°C	T4/103°C	-	-	32,4	600x465x180
	SLED-ME-600500	440	540	600	165	500 W	T6/85°C	T5/95°C	T5/T100°C	-	32,4	600x465x180

DIMENSIONAL DRAWING

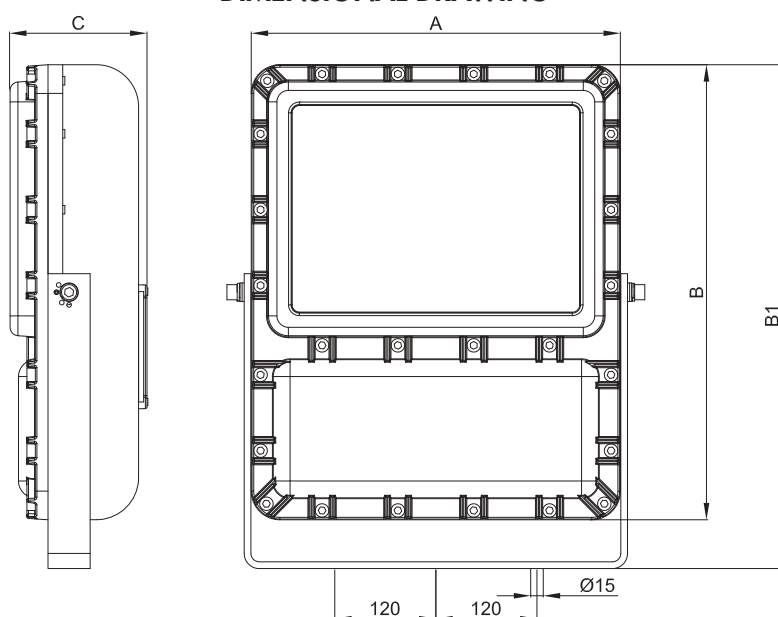


Dimensions in mm


EXPLODED DIAGRAM OF SLED-ME-600300 FLOODLIGHT

Descriptions:

1. Body including optics and LED board
2. Cover with tempered glass
3. UNI5931 stainless steel screws
4. 'Ex e' housing complete with power supply and terminals
5. Mounting bracket
6. 'Ex e' housing complete with terminals L, N, PE, Section max. 4 mm², suitable for loop-in, loop-out
7. Cover equipped with captive screws
8. Reflector optics

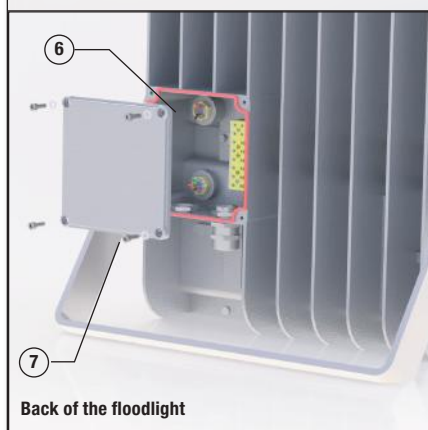

Back of the floodlight

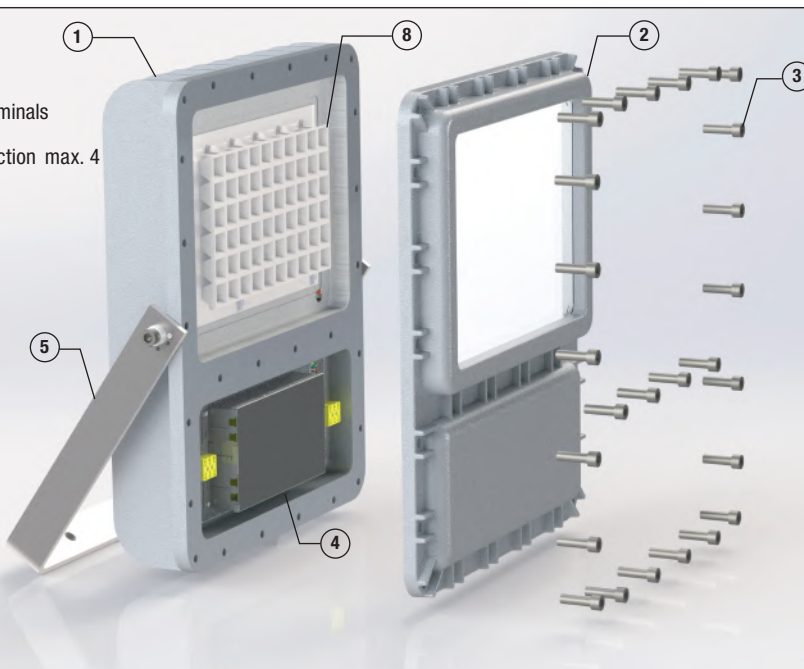


SLED-ME series LED floodlights "square shaped beam"


Electrical features	SLED-ME-250120	SLED-ME-250180	SLED-ME-400200
Power supply:	100-277 Vac $\pm 10\%$	120-277 Vac $\pm 10\%$	120-277 Vac $\pm 10\%$
Rated frequency:	50-60 Hz $\pm 5\%$	50-60 Hz $\pm 5\%$	50-60 Hz $\pm 5\%$
Power consumption*:	122 W	180 W	194 W
Connection:	Direct connection to terminal board L, N, Pe. Section 4mm ² , suitable for loop-in/loop-out		
Power factor*:	>0,95	>0,98	>0,96
Rated current*:	559 mA	798 mA	877 mA
EMC (electromagnetic compatibility):	EN 55015, EN 61547, IEC 61000-3-2, IEC 61000-3-3, IEC 61000-4-...		
THD (total harmonic distortion):	<15% 100-277 Vac	<10% 220-240 Vac	<20% 120-277 Vac
Over-voltage protection:	2 kV	6-10 kV	4 kV
Driver performances:	Over-Voltage protection, Over-Current protection, Short-Circuit protection		
Dimmer (on request):	(0-10 V) o PWM	(0-10 V) o PWM	(0-10 V)
Photometric features			
Viewing angle:	Cree	Cree	Cree
LED:	60°	98°	60°
Type:	Cool White	Cool White	Cool White
Colour temperature:	~ 5700 K	~ 5700 K	~ 5700 K
CRI**:	>70	>70	>70
Instant Restrike:	YES	YES	YES
L80:	> 72600 h	> 72600 h	> 72600 h
Lumen:	12387 lm	18490 lm	20744 lm
Maximum light intensity:	5206 cd	7600 cd	23491 cd
Overall efficiency:	101 lm/W	102 lm/W	107 lm/W

* Test at 230Vac


** Different CRI on request



SLED-ME-250120
Luminous flux: 12387 lm



SLED-ME-250180
Luminous flux: 18490 lm

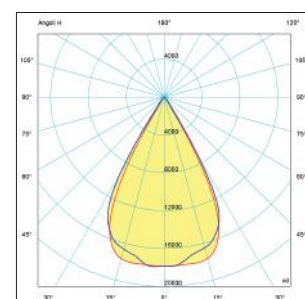

SLED-ME-400200
Luminous flux: 20744 lm

On Cortem Group web site you can download .LDT and .IES lighting data files for the design and simulation of lighting levels in 2D and 3D, rendering and ray tracing.


— = plane 90270
— = plane 0180

SLED-ME series LED floodlights "square shaped beam"


Electrical features	SLED-ME-400300	SLED-ME-600300	SLED-ME-600400	SLED-ME-600500
Power supply:	120-277 Vac $\pm 10\%$	120-277 Vac $\pm 10\%$	120-277 Vac $\pm 10\%$	100-240 Vac $\pm 10\%$
Rated frequency:	50-60 Hz $\pm 5\%$	50-60 Hz $\pm 5\%$	50-60 Hz $\pm 5\%$	50-60 Hz $\pm 5\%$
Power consumption*:	290 W	290 W	400 W	500 W
Connection:	Direct connection to terminal board L, N, Pe. Section 4mm ² , suitable for loop-in/loop-out			
Power factor*:	>0,98	>0,97	>0,97	>0,96
Rated current*:	1281 mA	1303 mA	1793 mA	2277 mA
EMC (electromagnetic compatibility):	EN 55015, EN 61547, IEC 61000-3-2, IEC 61000-3-3, IEC 61000-4...			
THD (total harmonic distortion):	<10% 220-240 Vac	<20% 120-277 Vac	<20% 120-277 Vac	<10% 220-240 Vac
Over-voltage protection:	6-10 kV	4 kV	2-4 kV	6-10 kV
Driver performances:	Over-Voltage protection, Over-Current protection, Short-Circuit protection			
Dimmer (on request):	(0-10 V) / PWM	(0-10 V)	(0-10 V) / PWM	(0-10 V) / PWM
Photometric features				
Viewing angle:	Cree	Cree	Cree	Cree
LED:	100°	60°	105°	110°
Type:	Cool White	Cool White	Cool White	Cool White
Colour temperature:	~ 5700 K	~ 5700 K	~ 5700 K	~ 5000 K
CRI**:	>70	>70	>70	>70
Instant Restrike:	YES	YES	YES	YES
L80*:	> 72600 h	> 72600 h	> 72600 h	> 118000
Lumen:	32092 lm	30799 lm	46145 lm	58045 lm
Maximum light intensity:	12899 cd	33976 cd	16600 cd	22360 cd
Overall efficiency:	110 lm/W	106 lm/W	115 lm/W	117 lm/W

* Test at 230Vac


** Different CRI on request




SLED-ME-400300
Luminous flux: 32092 lm



SLED-ME-600300
Luminous flux: 30799 lm



SLED-ME-600400
Luminous flux: 46145 lm




SLED-ME-600500
Luminous flux: 58045 lm

On Cortem Group web site you can download .LDT and .IES lighting data files for the design and simulation of lighting levels in 2D and 3D, rendering and ray tracing.

— = plane 90270
— = plane 0180


SLED-ME series Accessories and spare parts available on request

ILLUSTRATION	DESCRIPTION	MODEL	FEATURES	CODE	KEY
	Reinforced supporting bracket for mounting on movement facilities	SLED-ME-600...	Material: galvanised steel	G-558/1	 
	Frame for pole mounting	Per tutti i modelli	Material: galvanised steel	G-0534	 
	Swivel base for 360° adjustment	SLED-ME-400... SLED-ME-600...	Material: aluminum RAL 7035 painted	G-326 + G-327	 
	Cable gland for nonarmored cables	SLED-ME-250...	std. range cable 6,3÷11,6	NAV20SIB	 
		SLED-ME-400... SLED-ME-600...	std. range cable 11÷20	NAV25IB	
	Front ring with glass	SLED-ME-250...	Low copper content aluminium alloy with tempered glass	G250-0622	
		SLED-ME-400...		G400-0622	
		SLED-ME-600...		G-0622	
	Supporting bracket	SLED-ME-250...	Material: galvanised steel	G-901	
		SLED-ME-400...		G-896	
		SLED-ME-600...		G-558	
	Optics	SLED-ME-250120 SLED-ME-400200 SLED-ME-600300	Material: polycarbonate	PIXEL12	
	Alimentador electrónico	SLED-ME-250120	100-277 Vac	LEDDEV100	
		SLED-ME-400200	120-277 Vac	LEDDSLED-ME600	
		SLED-ME-600300	120-277 Vac	LEDDSLED-ME600	
		SLED-ME-250180	120-277 Vac	LEDDSLED-ME401	
		SLED-ME-400300	120-277 Vac	LEDDSLED-ME601	
		SLED-ME-600400	120-277 Vac	LEDDEV100 (x2)	
		SLED-ME-600500	100-277 Vac	LEDDSLED-ME1001	

Example of pole mounting



Example of vertical mounting on structure

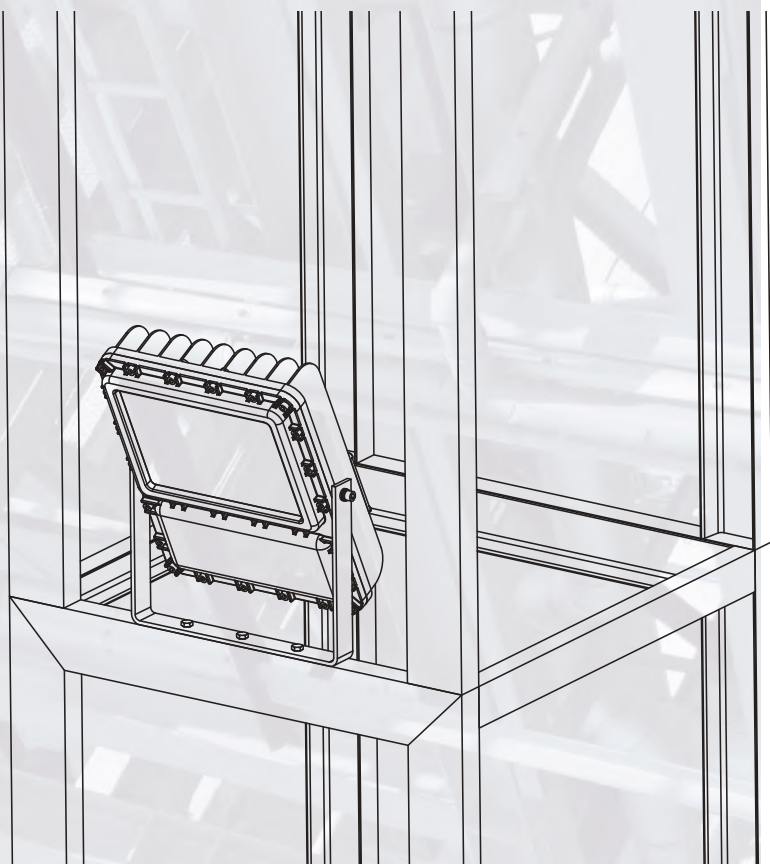

Example of horizontal mounting on structure

