

Tempered
Glass

Aluminium Body
Low Cooper

ZNK.X

Power LED

2x 1/2"
Cable entries



Product Certification Marking

IP Ambiant Temp. Standarts Cable Entries

Body

Difusser

Gaskets

Paint

Circuit

Rated Voltage

Frequency

Application

Aluminium Body Led Projector

SCA 20 ATEX V008X

II 3G Ex ec IIC T4 Gc

II 3D Ex tc IIIC T100°C Dc

IP 66

-20 °C up to +50 °C

EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014

2 x 1/2"

Low Cooper Aluminium Alloy

Shock and high temperature tempered glass

NBR oring on covers and high temp. res. silicone for glass

Electrostatic Powder Coat

Meanwell Driver and Samsung/Osram Led

100-240V

47/63 Hz

Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

ZONE 2 - 22


IP 66

$-20\text{ }^{\circ}\text{C} < T_a < +50\text{ }^{\circ}\text{C}$

included technology

| SAMSUNG | 

DIMENSIONAL DRAWING

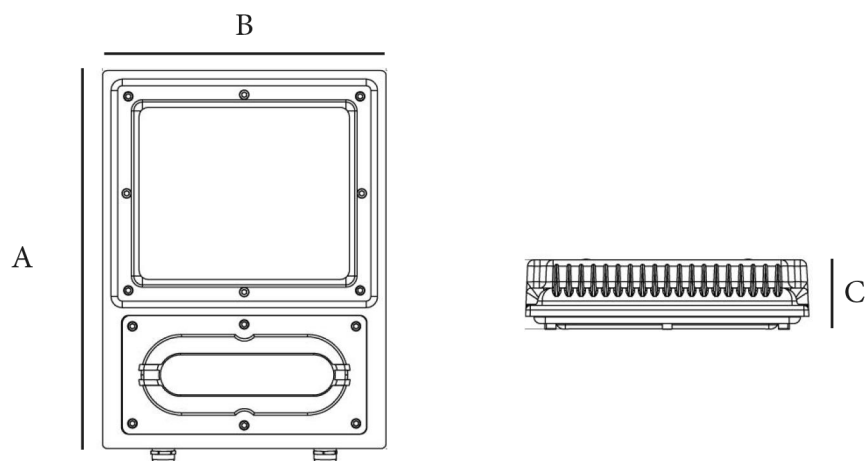

	A	B	C	Lumens	Power	weight (kg)
ZNK 35	305	205	70	~ 4800 lm	35w	5,4 kg
ZNK 50	305	205	70	~ 7040 lm	50w	5,4 kg
ZNK 75	305	205	70	~ 10400 lm	75w	5,4 kg
ZNK 100	400	300	75	~ 13500 lm	100w	9 kg
ZNK 125	400	300	75	~ 17000 lm	125w	9 kg
ZNK 150	400	300	75	~ 20500 lm	150w	9 kg
ZNK 180	400	300	75	~ 24500 lm	180w	9 kg



ZNK.

35W
50W
80W
100W
125W
150W
180W

Empty for Wall or Ceiling Bracket
P for Pendant or Pole Mounting

ATEX



| SAMSUNG |

