

PC Difusser  
UV Stabilized

PC Body  
UV Stabilized

M20X1,5  
Cable entries

Simplified  
maintenance

# ZNP.X

Fluorescent Lamp  
LED Tube



ZONE 2-22

IP 66

$-20\text{ }^{\circ}\text{C} < T_a < +55\text{ }^{\circ}\text{C}$

Emergency Kit

## Product

## Certification

## Marking

## IP

## Ambiant Temp.

## Standarts

## Cable Entries

## Body

## Difusser

## Gaskets

## Paint

## Circuit

## Rated Voltage

## Frequency

## Application

Polycarbonate Body Fluorescent or Led Tube Lighting Fixtures

SCA 19 ATEX V001X

II 3G Ex ec IIC T4 Gc

II 3D Ex tc IIIC T90°C Dc

IP 66

-20 °C up to +55 °C

EN60079-0:2018; EN60079-7:2015; EN60079-31:2014

2x M20X1,5

UV Stabilized PC

Shock and high temperature resistant polycarbonate tube

NBR oring on cover and gaskets


Plastic Injection Paint

Electronic Ballast, T8 lampholder.

220/240V

50/60 Hz

Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

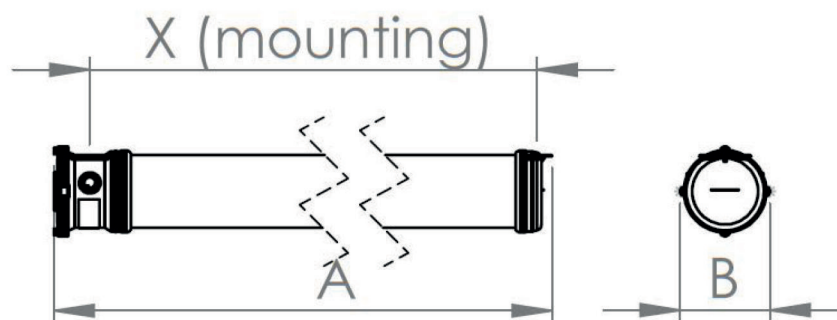

	A	B	x	weight (kg)
ZNP 2X36	1320	155	1250	
ZNP 2X36EM	1320	155	1250	
ZNP 2X16L	1320	155	1250	
ZNP 2X18	720	155	650	
ZNP 2X18EM	720	155	650	
ZNP 2X8L	720	155	650	

ZNP.2X

36W  
18W  
9W

*Empty for fluorescent*  
*EM for emergency kit*  
*L for Led Tube*



ZNP.X SERIES type fluorescent lamp comprises a lamp tube assembly with two end caps. The housing consists of a transparent polycarbonate tube with polycarbonate end caps. The electronics are located in the main body. Both end caps connected together by two 6 mm diameter tie bars, therefore compressing the tube and caps. The equipment is intended for fixed installation. The equipment has normal fluorescent lamp, led fluorescent lamp and emergency kit variations.

