



"Ex db-tb" EX-ROOF MOTOR SERİSİ

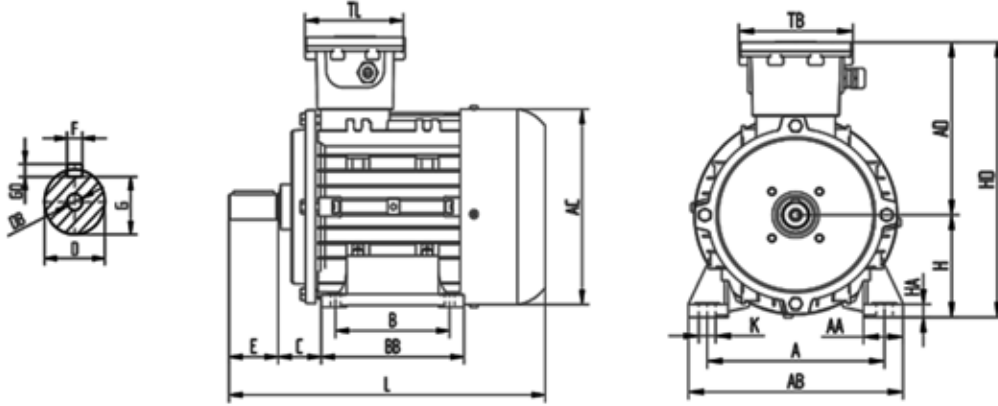

IM B3 AYAK BAĞLANTILI MOTOR TEKNİK ÖLÇÜLERİ

Gövde	AC	L	H	HD	A	B	AB	BB	K1	K	HA	C	E	D	DB	GA	FxGD	Rakor
63	124	211	63	204	100	80	120	100	10	7	7	40	23	11	-	12,5	4x4	M20x1,5
71	138	243	71	220	112	90	135	109	12	7	8	45	30	14	M5	16,0	5x5	M20x1,5
80	157	273	80	236	125	100	152	129	13	10	10	50	40	19	M6	21,5	6x6	M20x1,5
90S	175	308	90	248	140	100	170	127	13	10	10	56	50	24	M8	27,0	8x8	M20x1,5
90L	175	333	90	248	140	125	170	152	13	10	10	56	50	24	M8	27,0	8x8	M20x1,5
100	194	375	100	274	160	140	192	165	18	12	10	63	60	28	M10	31,0	8x8	M20x1,5
112	218	387	112	302	190	140	230	175	18	12	14	70	60	28	M10	31,0	8x8	M20x1,5

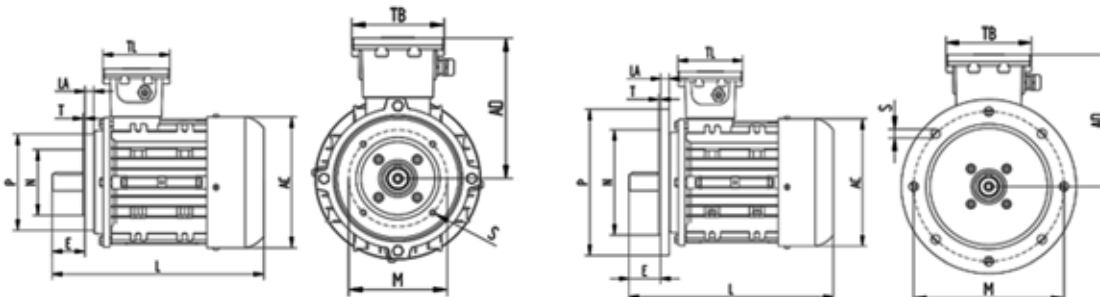

IM B14 FLANŞ TEKNİK ÖZELLİKLERİ

Gövde	P	N	M	T	S	AD
63	90	60	75	2,5	M5	141
71	105	70	85	2,5	M6	149
80	120	80	100	2,5	M6	156
90 S/L	140	95	115	3,0	M8	158
100	160	110	130	3,5	M8	174
112	160	110	130	3,5	M8	190

IM B5 FLANŞ TEKNİK ÖZELLİKLERİ

Gövde	P	N	M	T	S	AD
63	140	95	115	3,0	10	141
71	160	110	130	3,5	10	149
80	200	130	165	3,5	12	156
90 S/L	200	130	165	3,5	12	158
100	250	180	215	4,0	13	174
112	250	180	215	4,0	13	190

Ürün Kodu	Çıkış Gücü (kW)		rpm (min ⁻¹)		Mn (Nm)	In (A)	cosØ	MA/MN	IA/IN	Mmax /MN	Ağırlık (kg)
	50 Hz	60 Hz	50 Hz	60 Hz							

2 Kutup - 3000 / 3600 rpm

63 2A EX	0.18	0.22	2785	3345	0.63	0.65	0.69	2.3	4.2	2.7	4.8
63 2B EX	0.25	0.30	2755	3310	0.87	0.70	0.78	2.4	4.5	2.8	5.3
63 2C EX	0.37	0.44	2760	3315	1.30	1.20	0.70	2.3	4.3	2.6	5.7
71 2A EX	0.37	0.44	2790	3350	1.25	1.10	0.71	2.5	4.0	2.6	6.5
71 2B EX	0.55	0.66	2760	3310	1.90	1.45	0.80	2.4	4.5	2.5	7.4
80 2A EX	0.75	0.90	2800	3360	2.50	1.85	0.82	3.2	4.8	3.0	9.1
80 2B EX	1.10	1.32	2790	3350	3.80	2.60	0.83	2.5	5.0	3.2	10.2
90S 2A EX	1.50	1.80	2865	3440	5.00	3.25	0.83	2.4	6.1	2.6	13.4
90L 2B EX	2.20	2.64	2875	3450	7.30	4.75	0.81	2.7	6.6	2.9	15.3
100 2A EX	3.00	3.60	2875	3450	9.95	6.45	0.80	2.6	6.7	3.1	20.2
100 2B EX	4.00	4.80	2865	3440	13.2	7.50	0.88	2.7	7.6	3.0	23.7
112 2A EX	4.00	4.80	2895	3475	13.3	7.75	0.86	2.2	6.6	2.6	27.7
112 2B EX	5.50	6.60	2890	3470	17.8	9.80	0.90	2.1	7.3	2.3	28.9

Ürün Kodu	Çıkış Gücü (kW)		rpm (min ⁻¹)		Mn (Nm)	In (A)	cosØ	MA/MN	IA/IN	Mmax /MN	Ağırlık (kg)
	50 Hz	60 Hz	50 Hz	60 Hz							

4 Kutup - 1500 / 1800 rpm

63 4A EX	0.12	0.14	1380	1660	0.85	0.65	0.60	2.2	3.1	2.6	4.7
63 4B EX	0.18	0.22	1330	1600	1.30	0.75	0.68	1.9	3.0	2.3	5.1
63 4C EX	0.25	0.30	1320	1585	1.95	1.05	0.66	2.0	2.9	2.2	5.5
71 4A EX	0.25	0.30	1420	1705	1.70	1.00	0.70	2.3	3.3	2.5	6.4
71 4B EX	0.37	0.44	1425	1710	2.50	1.35	0.62	2.4	3.5	2.3	7.2
80 4A EX	0.55	0.66	1410	1690	3.80	1.50	0.73	2.0	3.7	2.0	9.9
80 4B EX	0.75	0.90	1430	1715	5.10	2.10	0.70	2.1	4.0	2.1	10.8
90S 4A EX	1.10	1.32	1420	1705	7.40	2.80	0.73	2.8	5.5	3.1	14.1
90L 4B EX	1.50	1.80	1415	1700	10.1	3.55	0.75	2.6	6.0	3.0	16.7
100 4A EX	2.20	2.64	1430	1715	14.6	4.90	0.76	2.1	5.6	2.7	22.4
100 4B EX	3.00	3.60	1425	1710	20.2	7.70	0.70	2.0	5.4	2.5	25.1
112 4A EX	4.00	4.80	1445	1735	26.5	8.50	0.81	2.1	7.0	3.0	29.8

Ürün Kodu	Çıkış Gücü (kW)		rpm (min ⁻¹)		Mn (Nm)	In (A)	cosØ	MA/MN	IA/IN	Mmax /MN	Ağırlık (kg)
	50 Hz	60 Hz	50 Hz	60 Hz							

6 Kutup - 1000 / 1200 rpm

71 6A EX	0.18	0.22	925	1110	1.90	0.65	0.70	1.8	3.1	2.0	6.4
71 6B EX	0.25	0.30	920	1105	2.60	0.90	0.71	1.9	3.1	2.1	7.3